



Australian Government

Australian Radiation Protection and Nuclear Safety Agency

A Survey of Naturally Occurring Radioactive Material Associated with Mining

*Stephen Long, Sandra Sdraulig,
Brendan Tate and Paul Martin*



Technical Report Series No. 161



Australian Government

Australian Radiation Protection and Nuclear Safety Agency

A Survey of Naturally Occurring Radioactive Material Associated with Mining

by

**Stephen Long, Sandra Sdraulig,
Brendan Tate and Paul Martin**

Technical Report No. 161
ISSN 0157-1400
August 2012

619 Lower Plenty Road
Yallambie VIC 3085
Telephone: +61 3 6433 2211
FAX: +61 3 9432 1835

Notice

Australian Radiation Protection and Nuclear Safety Agency 2012

ISSN: 0157-1400



Creative Commons

With the exception of the Commonwealth Coat of Arms, any ARPANSA logos and any content that is marked as being third party material, this publication, *A Survey of Naturally Occurring Radioactive Material Associated with Mining*, by the Australian Radiation Protection and Nuclear Safety Agency is licensed under a Creative Commons Attribution 3.0 Australia licence (<http://creativecommons.org/licenses/by/3.0/>). It is a further condition of the licence that any numerical data referred to in this publication may not be changed.

The publication should be attributed as *A Survey of Naturally Occurring Radioactive Material Associated with Mining*.

Enquiries regarding the licence and any use of this report are welcome.

ARPANSA
619 Lower Plenty Road
YALLAMBIE VIC 3085

Tel: 1800 022 333 (Freecall) or +61 3 9433 2211

Email: info@arpansa.gov.au

Website: www.arpansa.gov.au

Disclaimer

All care has been taken in the preparation of this work and its conclusions. However, where the data or results presented are utilised by third parties the Commonwealth of Australia shall not be liable for any special, indirect, consequential or other damages whatsoever resulting from such use. Nor will the Commonwealth of Australia be liable for any damages arising from or in connection with any errors or omissions that have inadvertently occurred in this work.

Acknowledgements

This study could not have been conducted without the assistance of the NSW Trade and Investment and, in particular, the assistance of Robert M^cLaughlin in their Resources & Energy Division, Mine Safety Operations Branch. Several of the Mine Safety Operations regional offices also provided assistance by enabling equipment to be shipped to and from their offices.

The authors would like to thank their colleagues Liesel Green, Jane Courtier, Emma Carey, David Urban and Robert Guilfoyle for assisting in the collection of samples. Shirley Hinton performed most of the radiochemical analysis on the samples and Ben Paritsky analysed the second set of radon monitors.

The assistance and cooperation provided by all of the mine operators that volunteered to participate in the study should also be acknowledged.

3.4 Radon in Underground Mines

The results from the initial survey are shown in figure 15. The measured radon concentrations are indicated by the height of the individual bars, while the error bars indicate the 95% confidence limits for each measurement. The bars are shaded to more easily differentiate data from different mines. The dark grey horizontal line shows the action level for occupational exposure (1000 Bq/m³; ARPANSA, 2002).

For most of the minesites, the averages of the measured radon concentrations were below the action level for occupational exposure.

For operator o, the average of the measured concentrations exceeded the action level. The two measurements were carried out at mine extraction exhaust locations, and so it is possible that concentrations in other parts of the mine are lower than at these locations.

A further set of monitors were sent to operators o and y to be placed in the working areas of the mine as a follow-up survey. Monitors were in place in the period February-April 2012 (Figure 16). In the case of operator o, there were two underground mines being worked in the same region, and sufficient monitors were supplied to make measurements in both mines on this occasion. The repeat results for the first mine are designated o31-o36 and those from the second (new) mine are designated o21-o26. The repeat results for the other operator are designated y21-y26. For all three minesites, the averages of the radon concentrations measured were below the action level.

Overall, variability in radon concentrations between minesites was quite large with averages at each mine ranging from less than 100 Bq/m³ to above 800 Bq/m³. There was also high variability between samples at each individual mine. This was to be expected considering the different types of location for detectors chosen at each of the mines. A number of detectors were placed in mine exhausts, but some detectors were also placed in well ventilated areas where radon concentrations could be expected to be low. The results are presented in Table 3.

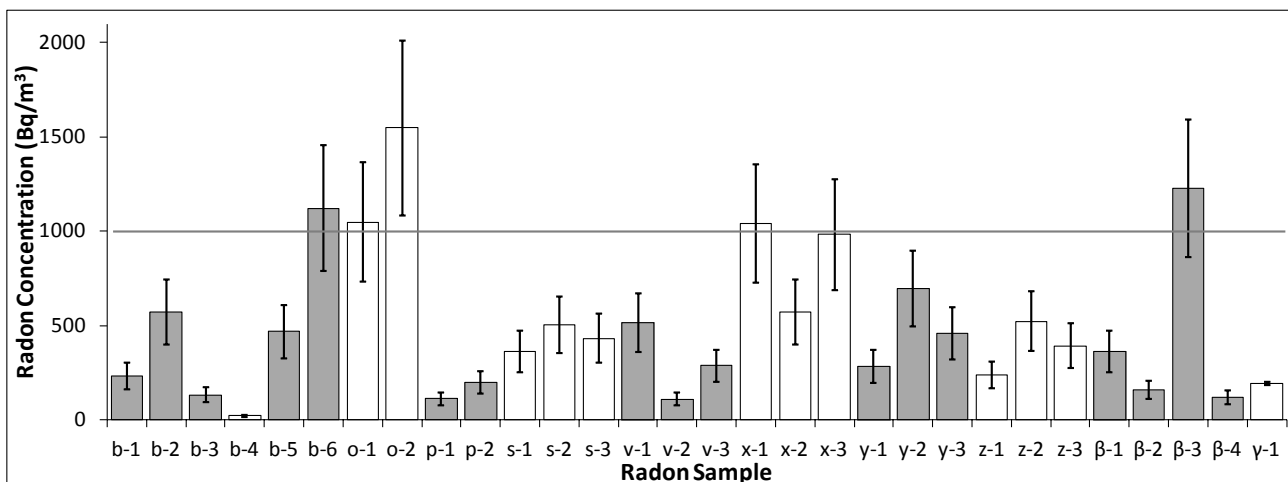


Figure 15: Measured radon concentration in underground mines, March-May 2011.

The error bars indicate the 95% confidence interval of the measurements.

The horizontal line indicates the action level for occupational exposure to radon.

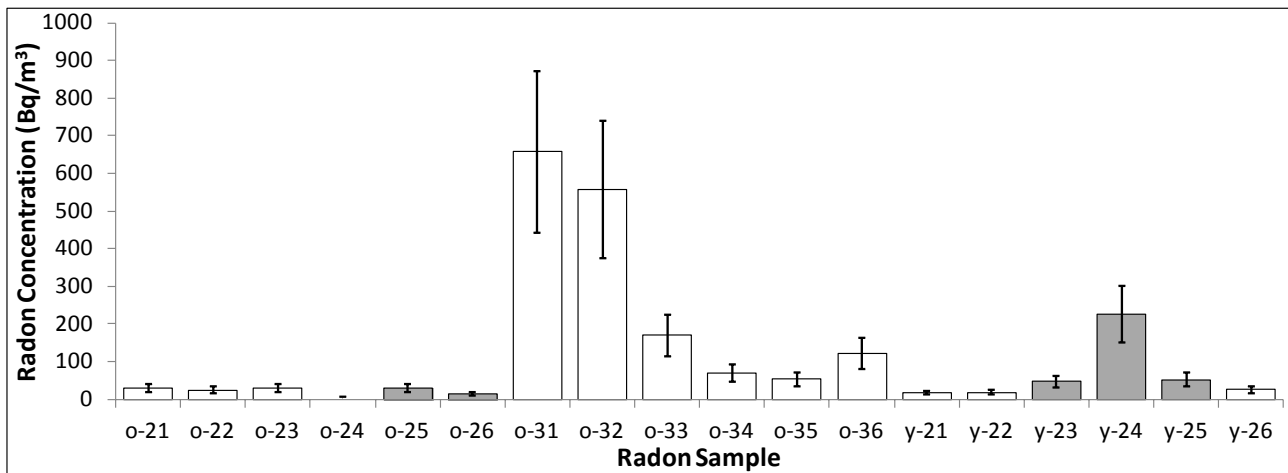


Figure 16: Measured radon concentration at work areas in mines, February-April 2012.
The error bars indicate the 95% confidence interval of the measurements.

Table 3: Placement of radon monitors at mines, and average and range of measured radon concentrations

| Mine | Number of Monitors | Date Placed | Days in Place | Average Rn (Bq/m ³) | Range (Bq/m ³) |
|-----------|--------------------|---------------|---------------|---------------------------------|----------------------------|
| b-1-6 | 6 | March 2011 | 54 | 420 | 20-1120 |
| o-1,2 | 2 | April 2011 | 14 | 1300 | 1050-1550 |
| o-31-36 | 6 | February 2012 | 31 | 270 | 50-660 |
| p-1,2 | 2 | April 2011 | 83 | 160 | 110-200 |
| s-1,2,3 | 3 | April 2011 | 21 | 430 | 360-500 |
| v-1,2,3 | 3 | April 2011 | 34 | 300 | 110-520 |
| x-1,2,3 | 3 | May 2011 | 14 | 860 | 570-1040 |
| y-1,2,3 | 3 | May 2011 | 15 | 480 | 280-700 |
| y-21-26 | 6 | February 2012 | 30 | 70 | 20-230 |
| z-1,2,3 | 3 | May 2011 | 36 | 380 | 240-520 |
| β-1,2/3,4 | 2 | May-June 2011 | 37,48 | 470 | 120-1230 |
| o-21-26 | 6 | February 2012 | 41 | 20 | 0-30 |

4. Conclusion

In most cases, the activity concentrations of the U-238 and Th-232 decay series radionuclides in the ore, tailings and solid waste from all of the mine types were found to be consistent with the range expected from soils (20 – 70 Bq/kg). Furthermore, in most cases, the radionuclides in each series were found to be in secular equilibrium, indicating that the processing of the ores does not significantly alter the elemental composition of the materials.

Almost all of the waters from the mines exhibited significant enhancement of U-234. They also exhibit significant variations in the activity concentrations of the other radionuclides in the series relative to U-238. Nonetheless, the actual activity concentrations in most of the water samples were low and most would meet the Australian Drinking Water Guidelines (NHMRC 2004) in terms of radioactivity.

These results indicate that most mining operations do not have issues relating to elevated levels of naturally occurring radioactive materials.

The significant exceptions were three metalliferous mines which were found to have activity concentrations of U-238 and Th-232 decay series radionuclides in the ore, products, tailings and solid wastes approaching the regulatory reference level of 1000 Bq/kg. However, all three of these mines extract heavy metal products from the ores and are already covered by a specific code of practice (ARPANSA 2005).

While the mine waters from the coal mines were consistent with the activity concentrations found in normal waters, the activity levels of U-234 were found to be relatively high in most of the process waters. It was noted that these process waters were highly recycled, enabling this radionuclide to accumulate over time. It was also noted that the highly recycled process waters were relatively depleted in Ra-226. The large disequilibrium between uranium and radium in the process water and whether the radium precipitates out in the system should be further investigated.

The measurements of radon from the underground mines gave average radon concentrations which were below the action level for occupational exposure (1000 Bq/m³), for the period and locations measured. However, variability in concentrations was quite high, both within and between minesites. The high variability between sampling locations within some minesites is most probably due to the effects of varying ventilation rates in different areas and accumulation of radon in the air stream as it passes through the mine workings. Average mine concentrations ranged from less than 100 Bq/m³ to above 800 Bq/m³. Given the high variability observed, and the limited number of mines sampled, this study indicates that it is likely some underground mines may be above the action level.

References

- ARPANSA (Australian Radiation Protection and Nuclear Safety Agency) 2002. Recommendations for Limiting Exposure to Ionizing Radiation (1995) and National Standard for Limiting Occupational Exposure to Ionizing Radiation. Republished 2002. Radiation Protection Series No. 1. Commonwealth of Australia.
- ARPANSA 2004. National Directory for Radiation Protection – Edition 1.0. Radiation Protection Series No. 6. Commonwealth of Australia.
- ARPANSA 2005. Code of Practice and Safety Guide for Radiation Protection and Radioactive Waste Management in Mining and Mineral Processing, Radiation Protection Series No. 9. Commonwealth of Australia.
- ARPANSA 2008a. The Radioactive Content of Some Australian Drinking Waters, ARPANSA Technical Report 148. Commonwealth of Australia.
- ARPANSA 2008b. Safety Guide for the Management of Naturally Occurring Radioactive Material (NORM), Radiation Protection Series No. 15. Commonwealth of Australia.
- IAEA (International Atomic Energy Agency) 2004. Application of the Concepts of Exclusion, Exemption and Clearance. Vienna. IAEA Safety Standards Series: Safety Guide No. RS-G-1.7.
- ICRP (International Commission on Radiation Protection) 2010. Lung Cancer Risk from Radon and Progeny and Statement on Radon. ICRP Publication 115.
- NHMRC (National Health and Medical Research Council) 2004. Australian Drinking Water Guidelines, Commonwealth of Australia, Canberra.
<http://www.nhmrc.gov.au/publications/synopses/eh19syn.htm>.
- WHO (World Health Organization) 2009. WHO Handbook on Indoor Radon: A Public Health Perspective, Geneva. http://www.who.int/ionizing_radiation/env/9789241547673/en/
- UNSCEAR 2000. Sources and Effects of Ionising Radiation, United Nations Scientific Committee on the Effects of Ionising Radiation, United Nations, New York.

Appendix A: Tabulated Results for Quarries

In the following tables:

The quoted uncertainties indicate the 95% confidence interval.

The term 'Not Available' means that sample could not be chemically treated in order to extract these radionuclides.

The term 'MDC' refers to estimate of the smallest activity concentration of the radionuclide that can be quantified with 95% confidence.

The term '<MDC' means that the activity concentration of the radionuclide could not be quantified in the sample.

Table A1: Activity Concentration (Bq/kg) of Radionuclides in Ore

| Sample | Polonium-210 | Lead-210 | Radium-226 | Thorium-230 | Uranium-234 | Uranium-238 | Thorium-228 | Radium-228 | Thorium-232 |
|------------|--------------|-----------|------------|---------------|-------------|-------------|-------------|------------|---------------|
| a117 | 27.3 ± 4.4 | 17 ± 16 | 25.1 ± 3.5 | Not Available | 28.6 ± 4.4 | 30.6 ± 4.6 | 20.8 ± 3.1 | 20.1 ± 4.8 | Not Available |
| a118 | 26.3 ± 4.6 | 42 ± 18 | 26.7 ± 4.1 | Not Available | 28.3 ± 4.6 | 28.7 ± 4.6 | 22.2 ± 3.3 | 17.5 ± 5.8 | Not Available |
| e137 | 14.1 ± 3.4 | 13 ± 9 | 13.6 ± 2.1 | 13.5 ± 5.3 | 14.8 ± 2.8 | 14.3 ± 2.7 | 17.6 ± 2.5 | 22.0 ± 4.0 | 14.9 ± 5.5 |
| i170 | 15.2 ± 3.1 | 25 ± 11 | 18.6 ± 2.8 | Not Available | 10.9 ± 2.4 | 10.7 ± 2.4 | 19.0 ± 2.8 | 21.6 ± 4.5 | Not Available |
| j171 | 30.7 ± 5.7 | 32 ± 17 | 32.0 ± 4.2 | Not Available | 32.9 ± 6.2 | 29.3 ± 5.8 | 43.9 ± 6.0 | 43.0 ± 6.3 | Not Available |
| j172 | 27.4 ± 4.6 | 19 ± 16 | 28.6 ± 3.7 | Not Available | 28.7 ± 5.1 | 33.9 ± 5.8 | 43.2 ± 5.9 | 42.9 ± 6.5 | Not Available |
| q223 | <MDC | <MDC | <MDC | Not Available | <MDC | <MDC | <MDC | <MDC | Not Available |
| r226 | 5.0 ± 2.5 | | 4.3 ± 1.2 | Not Available | 7.2 ± 2.5 | 6.0 ± 2.1 | 4.0 ± 1.1 | <MDC | Not Available |
| <i>MDC</i> | <i>4.0</i> | <i>20</i> | <i>10</i> | <i>4.0</i> | <i>4.0</i> | <i>4.0</i> | <i>10</i> | <i>10</i> | <i>4.0</i> |

Table C2: Activity Concentration (Bq/kg) of Radionuclides in Product

| Sample | Polonium-210 | Lead-210 | Radium-226 | Thorium-230 | Uranium-234 | Uranium-238 | Thorium-228 | Radium-228 | Thorium-232 |
|------------|--------------|-----------|------------|-------------|-------------|-------------|-------------|------------|-------------|
| b125 | 12.4 ± 5.5 | <MDC | 14.3 ± 2.2 | 12.0 ± 3.5 | 10.6 ± 3.5 | 10.3 ± 3.2 | 13.4 ± 2.5 | 15.7 ± 4.0 | 9.3 ± 3.0 |
| b126 | 20.6 ± 6.2 | 30 ± 16 | 25.7 ± 3.3 | 16.9 ± 3.8 | 16.6 ± 3.9 | 12.9 ± 3.2 | 23.5 ± 3.4 | 24.9 ± 3.8 | 19.0 ± 4.0 |
| h163 | 10.6 ± 4.7 | <MDC | 12.8 ± 2.8 | 7.0 ± 3.5 | 10.8 ± 4.0 | 10.9 ± 4.0 | 10.4 ± 2.7 | 7.3 ± 5.0 | 10.1 ± 3.0 |
| h164 | 17.1 ± 8.0 | 29 ± 22 | 12.4 ± 3.0 | 13.1 ± 4.2 | 18.3 ± 6.4 | 15.5 ± 5.5 | 19.1 ± 3.9 | 19.2 ± 6.3 | 19.1 ± 4.3 |
| h165 | 17.9 ± 7.3 | 26 ± 16 | 15.3 ± 2.7 | 9.8 ± 3.7 | 9.6 ± 3.9 | 12.8 ± 4.1 | 18.2 ± 3.3 | 19.6 ± 5.4 | 11.8 ± 3.2 |
| k174 | 5.7 ± 2.3 | <MDC | 7.0 ± 2.2 | 5.3 ± 2.2 | 5.1 ± 2.7 | 4.4 ± 2.3 | 6.5 ± 2.1 | <MDC | 4.0 ± 1.6 |
| l184 | 6.4 ± 3.0 | <MDC | 9.1 ± 2.0 | 7.3 ± 2.7 | 5.9 ± 2.7 | 5.5 ± 2.4 | 11.2 ± 1.9 | 10.4 ± 2.8 | 8.3 ± 2.4 |
| m189 | 6.5 ± 3.6 | <MDC | 9.4 ± 3.2 | 5.4 ± 3.1 | 7.3 ± 3.2 | 3.8 ± 2.2 | 12.3 ± 2.8 | 15.1 ± 5.7 | 7.4 ± 2.7 |
| n192 | 8.7 ± 3.0 | <MDC | 8.8 ± 3.8 | 4.4 ± 3.7 | 6.7 ± 2.8 | 7.5 ± 2.7 | 9.7 ± 3.4 | 8.7 ± 7.6 | 6.8 ± 2.9 |
| n193 | 10.0 ± 4.0 | <MDC | 6.2 ± 3.2 | 5.1 ± 3.2 | 6.0 ± 2.8 | 3.9 ± 2.1 | 4.6 ± 3.2 | <MDC | 4.1 ± 1.9 |
| s243 | 25.3 ± 5.8 | <MDC | 24.6 ± 3.6 | 20.6 ± 4.3 | 21.9 ± 4.8 | 18.9 ± 4.3 | 24.4 ± 3.8 | 24.8 ± 6.5 | 21.2 ± 4.3 |
| <i>MDC</i> | <i>4.0</i> | <i>30</i> | <i>10</i> | <i>4.0</i> | <i>4.0</i> | <i>4.0</i> | <i>10</i> | <i>10</i> | <i>4.0</i> |

Table C3: Activity Concentration (Bq/kg) of Radionuclides in Solid Waste

| Sample | Polonium-210 | Lead-210 | Radium-226 | Thorium-230 | Uranium-234 | Uranium-238 | Thorium-228 | Radium-228 | Thorium-232 |
|------------|--------------|-----------|------------|-------------|-------------|-------------|-------------|------------|-------------|
| b124 | 37.4 ± 7.0 | 53 ± 14 | 46.5 ± 5.4 | 26.7 ± 4.7 | 26.9 ± 4.6 | 16.0 ± 3.2 | 56.5 ± 7.2 | 55.3 ± 6.9 | 35.7 ± 5.5 |
| h166 | 21.2 ± 5.1 | 47 ± 16 | 20.8 ± 3.1 | 23.1 ± 4.9 | 22.2 ± 5.3 | 22.4 ± 5.1 | 38.7 ± 5.4 | 36.4 ± 6.8 | 29.4 ± 5.2 |
| k175 | 18.4 ± 4.2 | 26 ± 17 | 28.4 ± 3.7 | 14.1 ± 3.3 | 15.1 ± 3.6 | 9.8 ± 2.7 | 43.8 ± 5.9 | 38.7 ± 5.7 | 20.1 ± 3.7 |
| l185 | 17.0 ± 4.5 | 30 ± 11 | 18.7 ± 2.5 | 12.0 ± 4.3 | 10.8 ± 3.6 | 9.2 ± 3.1 | 21.9 ± 3.1 | 18.8 ± 3.3 | 11.3 ± 3.8 |
| l186 | 20.4 ± 4.7 | 23 ± 12 | 26.1 ± 3.2 | 16.4 ± 3.8 | 14.5 ± 3.5 | 10.3 ± 2.8 | 31.4 ± 4.2 | 25.9 ± 3.9 | 9.8 ± 2.8 |
| n194 | 20.7 ± 4.8 | 28 ± 15 | 22.2 ± 3.3 | 14.4 ± 3.6 | 17.3 ± 3.8 | 13.2 ± 3.2 | 32.0 ± 4.6 | 31.2 ± 5.9 | 22.5 ± 4.2 |
| s244 | 35.6 ± 6.8 | 103 ± 24 | 76.2 ± 9.0 | 27.7 ± 5.1 | 30.6 ± 7.1 | 29.4 ± 6.8 | 54.8 ± 7.4 | 48.6 ± 7.3 | 38.0 ± 6.0 |
| <i>MDC</i> | <i>4.0</i> | <i>20</i> | <i>10</i> | <i>4.0</i> | <i>4.0</i> | <i>4.0</i> | <i>10</i> | <i>10</i> | <i>4.0</i> |

Table C4: Activity Concentration (Bq/kg) of Radionuclides in Tailings

| Sample | Polonium-210 | Lead-210 | Radium-226 | Thorium-230 | Uranium-234 | Uranium-238 | Thorium-228 | Radium-228 | Thorium-232 |
|--------|---------------|---------------|------------|---------------|---------------|---------------|---------------|------------|---------------|
| b127 | 34.1 ± 6.8 | 45.0 ± 21.0 | 42.4 ± 5.4 | 30.1 ± 5.7 | 27.7 ± 5.5 | 21.4 ± 4.6 | 53.1 ± 7.2 | 59.8 ± 9.6 | 39.5 ± 6.5 |
| h167 | 24.8 ± 5.7 | 34.0 ± 22.0 | 31.7 ± 4.5 | 29.3 ± 5.3 | 28.4 ± 5.9 | 24.6 ± 5.2 | 30.2 ± 4.5 | 41.6 ± 7.0 | 32.5 ± 5.4 |
| k181 | 16.4 ± 5.4 | 24.0 ± 25.0 | 18.3 ± 4.4 | 12.0 ± 3.5 | 10.0 ± 3.2 | 8.3 ± 2.7 | 32.0 ± 5.0 | 25.0 ± 6.2 | 9.7 ± 3.0 |
| l187 | 39.9 ± 8.2 | 43.0 ± 19.0 | 34.3 ± 4.7 | 21.7 ± 4.6 | 14.2 ± 3.8 | 15.9 ± 3.8 | 43.2 ± 6.0 | 48.8 ± 8.7 | 23.4 ± 4.8 |
| n195 | Not Available | Not Available | 20.3 ± 4.8 | Not Available | Not Available | Not Available | Not Available | 31.9 ± 8.9 | Not Available |
| MDC | 4.0 | 30 | 10 | 4.0 | 4.0 | 4.0 | 10 | 10 | 4.0 |

Table C5: Activity Concentration (mBq/litre) of Radionuclides in Mine and Process Water

| | Sample | Polonium-210 | Lead-210 | Radium-226 | Thorium-230 | Uranium-234 | Uranium-238 |
|----------------|--------|--------------|-------------|-------------|-------------|----------------|--------------|
| Mine | b121 | <MDC | <MDC | 13.3 ± 3.0 | <MDC | 274.0 ± 75.0 | 74.0 ± 16.0 |
| | h169 | <MDC | <MDC | <MDC | <MDC | 88.0 ± 13.0 | 26.2 ± 5.5 |
| | k178 | <MDC | <MDC | 21.7 ± 8.7 | 4.6 ± 3.9 | 223.0 ± 28.0 | 46.8 ± 8.0 |
| | s246 | 41.4 ± 7.4 | 46.0 ± 29.0 | <MDC | <MDC | 5.3 ± 2.8 | 3.0 ± 2.1 |
| Process | b120 | <MDC | 52.0 ± 27.0 | 7.9 ± 7.8 | <MDC | 433.0 ± 63.0 | 185.0 ± 29.0 |
| | h168 | 4.8 ± 3.0 | 21.0 ± 26.0 | 12.0 ± 7.9 | <MDC | 89.0 ± 13.0 | 30.6 ± 6.0 |
| | k179 | <MDC | <MDC | 10.7 ± 8.2 | <MDC | 751.0 ± 94.0 | 221.0 ± 31.0 |
| | k180 | <MDC | <MDC | 35.3 ± 9.7 | 1.8 ± 1.2 | 1240.0 ± 140.0 | 305.0 ± 38.0 |
| | l188 | <MDC | <MDC | 14.3 ± 9.5 | <MDC | 359.0 ± 44.0 | 78.0 ± 12.0 |
| | n196 | <MDC | <MDC | 60.0 ± 12.0 | <MDC | 188.0 ± 25.0 | 128.0 ± 18.0 |
| | s245 | 31.2 ± 6.0 | 54.0 ± 31.0 | 43.0 ± 11.0 | <MDC | 12.3 ± 3.8 | 3.8 ± 2.2 |
| | MDC | 4.0 | 40 | 10 | 4.0 | 4.0 | 4.0 |